
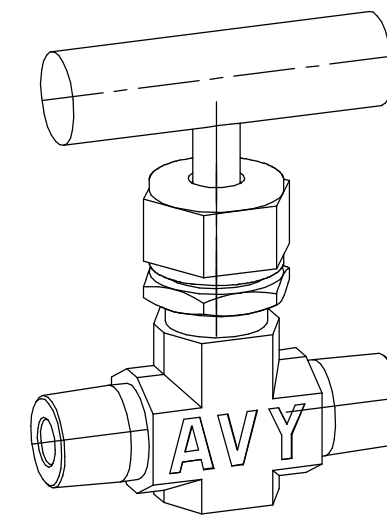


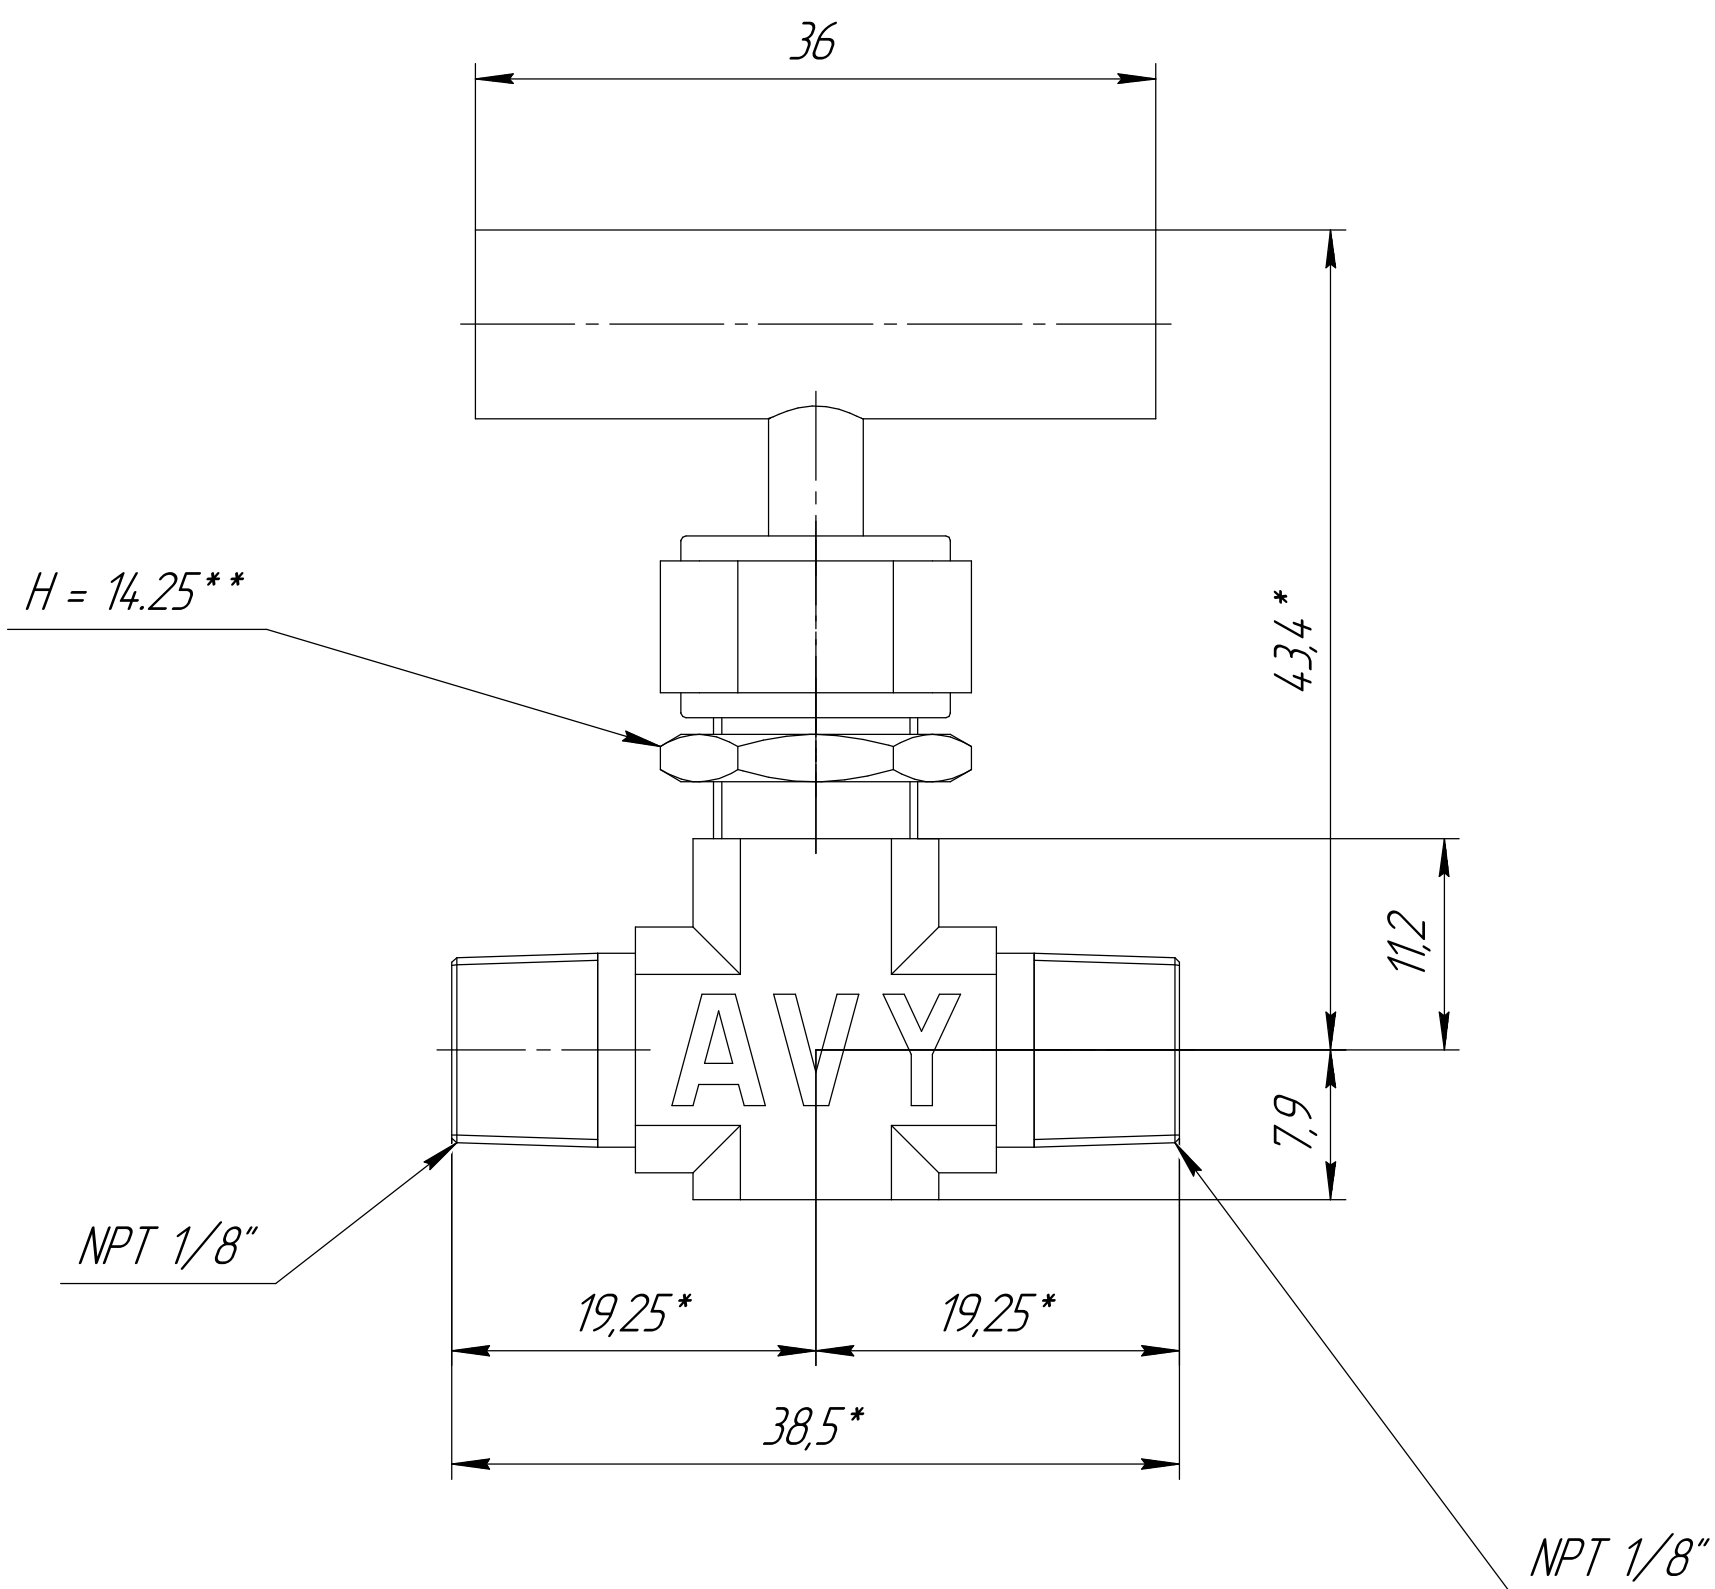

1. *This size may depend on the degree of tightening zaŭku
- 2 Pressure rating 413bar ($T = 21^{\circ}\text{C}$)
- 3 Temperature rating from -54 to 232°C
- 4 Needle V-shaped

					NV1-M-2N.AVY.ORG				
<i>Ch. Sheet</i>	<i>Nº doc.</i>	<i>Sign.</i>	<i>Date</i>		<i>Needle valve</i>	<i>Char.</i>	<i>Weight</i>	<i>Scale</i>	
<i>Develop.</i>									2.5:1
<i>Checked</i>									
<i>Tech. contr.</i>						<i>Sheet</i>	<i>Sheets</i>	<i>1</i>	
<i>Reg. contr.</i>						<i>HY-LOK CORPORATION</i>			
<i>Approv.</i>									