
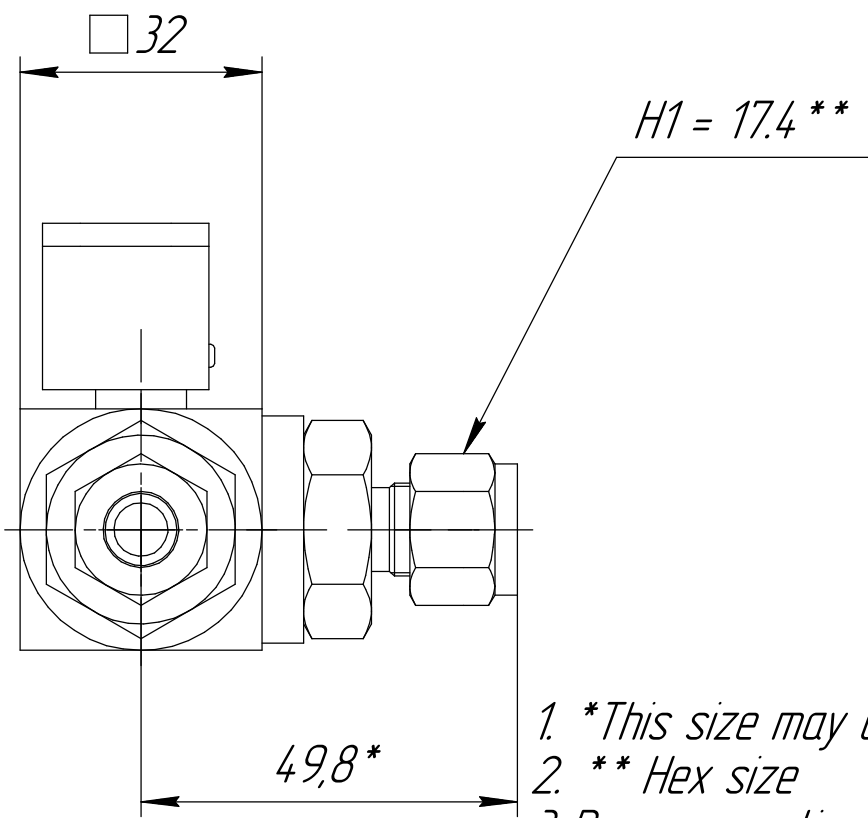
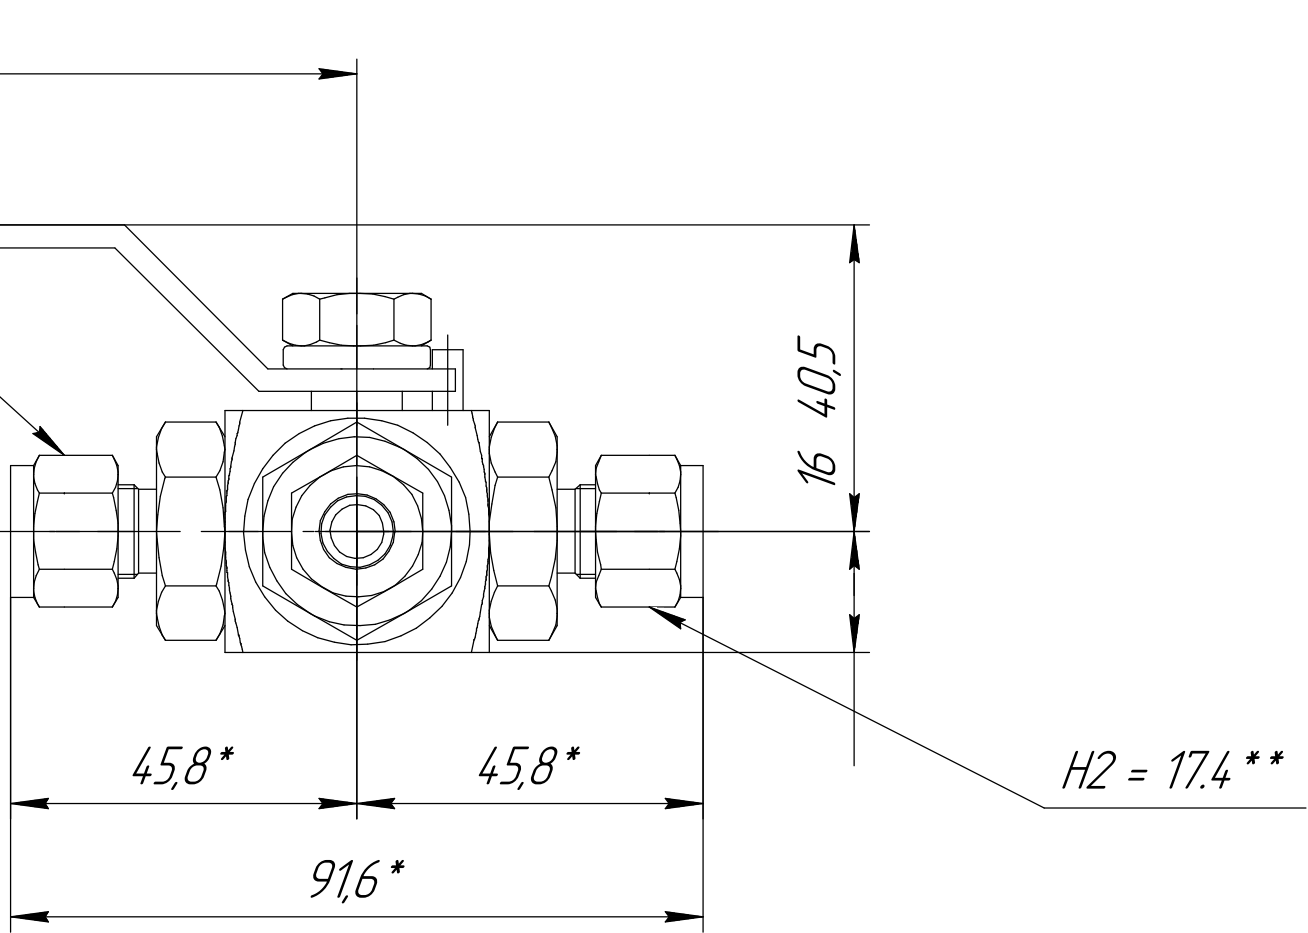
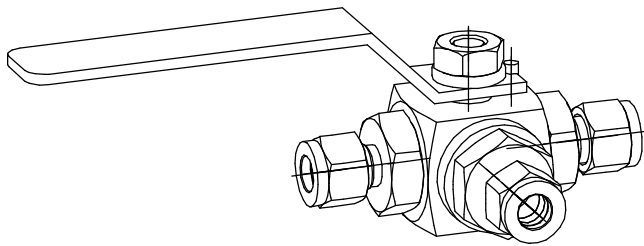


H1B-3S-H-6T-PC.AVY.ORG

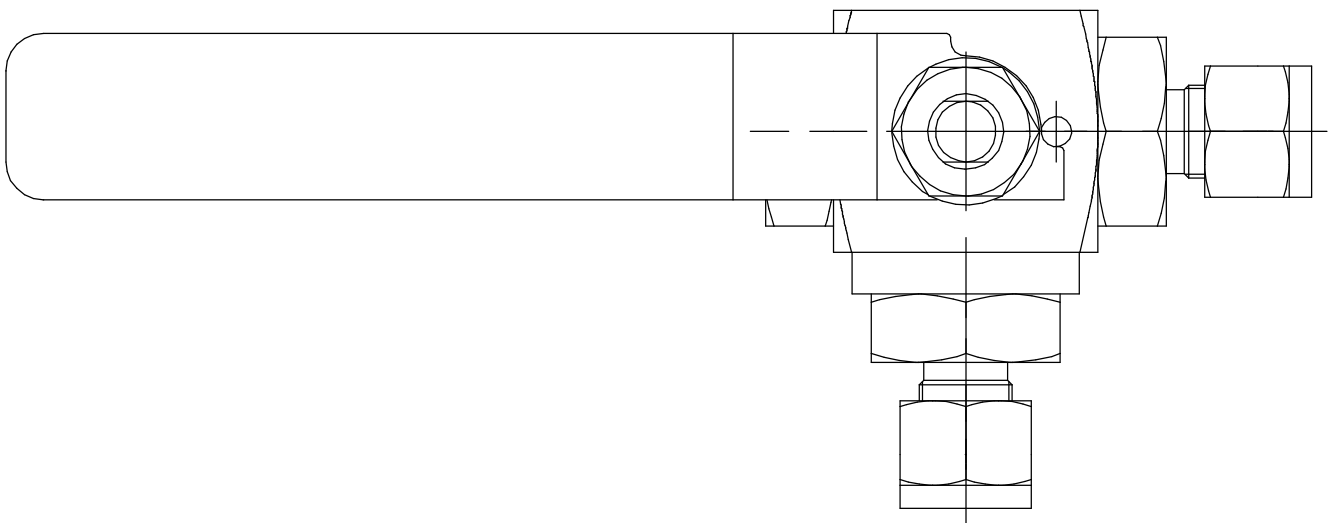

1. \*This size may depend on the degree of tightening
2. \*\* Hex size
- 3 Pressure rating 414bar (T = 21 °C)
- 4 Temperature rating from -54 to 260°C

|               |  |
|---------------|--|
| First mention |  |
| Reference N°  |  |

|                |  |
|----------------|--|
| Sign. and date |  |
| Inv. N° copy   |  |
| Exch. inv. N°  |  |
| Sign. and date |  |
| Inv. N° orig.  |  |

|                        |         |       |      |                    |  |
|------------------------|---------|-------|------|--------------------|--|
| H1B-3S-H-6T-PC.AVY.ORG |         |       |      |                    |  |
| Ch. Sheet              | N° doc. | Sign. | Date | Ball Valve         |  |
| Develop.               |         |       |      |                    |  |
| Checked                |         |       |      |                    |  |
| Tech. contr.           |         |       |      |                    |  |
| Reg. contr.            |         |       |      | HY-LOK CORPORATION |  |
| Approv.                |         |       |      |                    |  |
| Copied                 |         |       |      | Format A2          |  |