
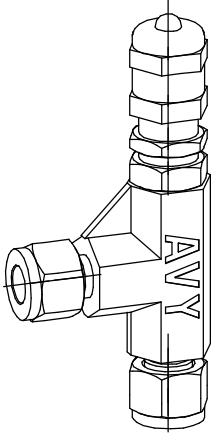
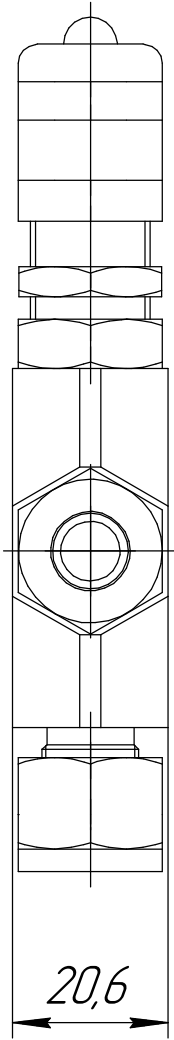


|               |                |               |              |                |              |               |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|
| Inv. N° orig. | Sign. and date | Exch. inv. N° | Inv. N° copy | Sign. and date | Reference N° | First mention |
|               |                |               |              |                |              |               |

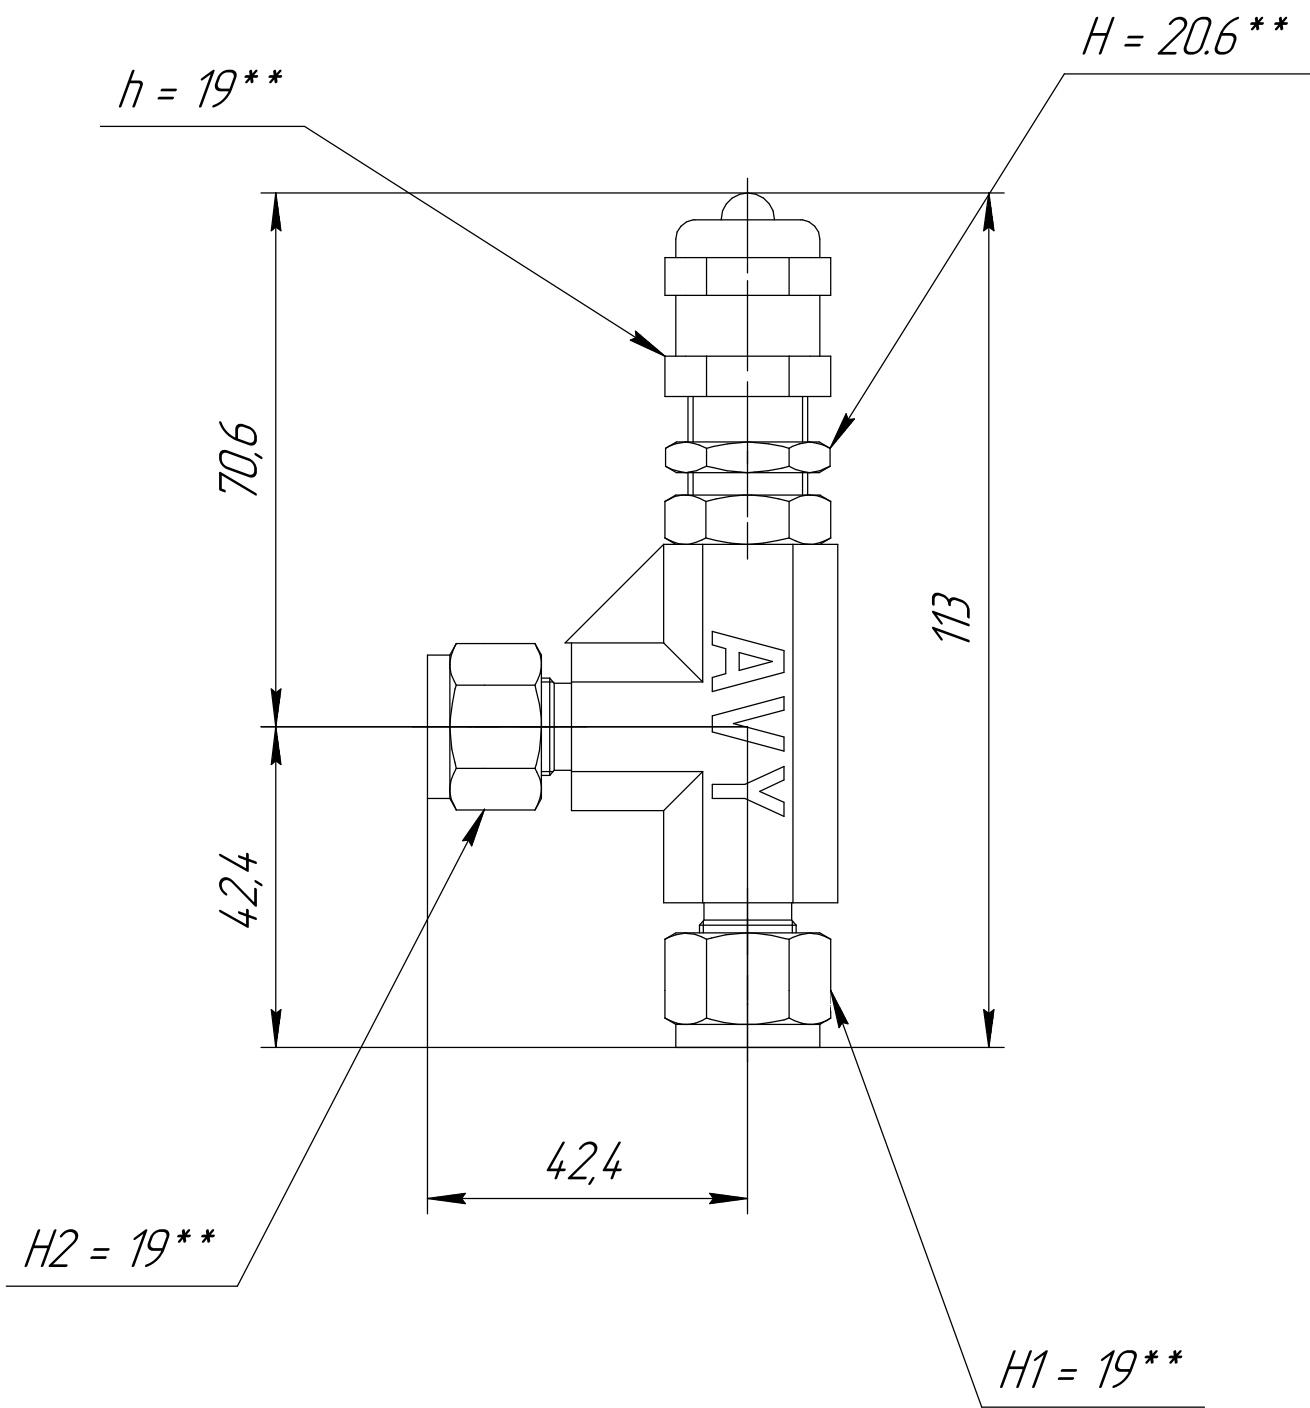

RV2-H-10M-EP-E.AVY.ORG

- \*This size may depend on the degree of tightening
- \*\* Hex size
- Temperature rating from -46 to 149°C

|              |         |       |      |  |                        |                    |  |        |       |
|--------------|---------|-------|------|--|------------------------|--------------------|--|--------|-------|
|              |         |       |      |  | RV2-H-10M-EP-E.AVY.ORG |                    |  |        |       |
|              |         |       | x    |  | Relief valve           | Char.              |  | Weight | Scale |
|              |         |       | y    |  |                        |                    |  |        | 1:1   |
| Ch. Sheet    | Nº doc. | Sign. | Date |  |                        |                    |  |        |       |
| Develop.     |         |       |      |  |                        |                    |  |        |       |
| Checked      |         |       |      |  |                        |                    |  |        |       |
| Tech. contr. |         |       |      |  |                        | Sheet              |  | Sheets | 1     |
|              |         |       |      |  |                        | HY-LOK CORPORATION |  |        |       |
| Reg. contr.  |         |       |      |  |                        |                    |  |        |       |
| Approv.      |         |       |      |  |                        |                    |  |        |       |