
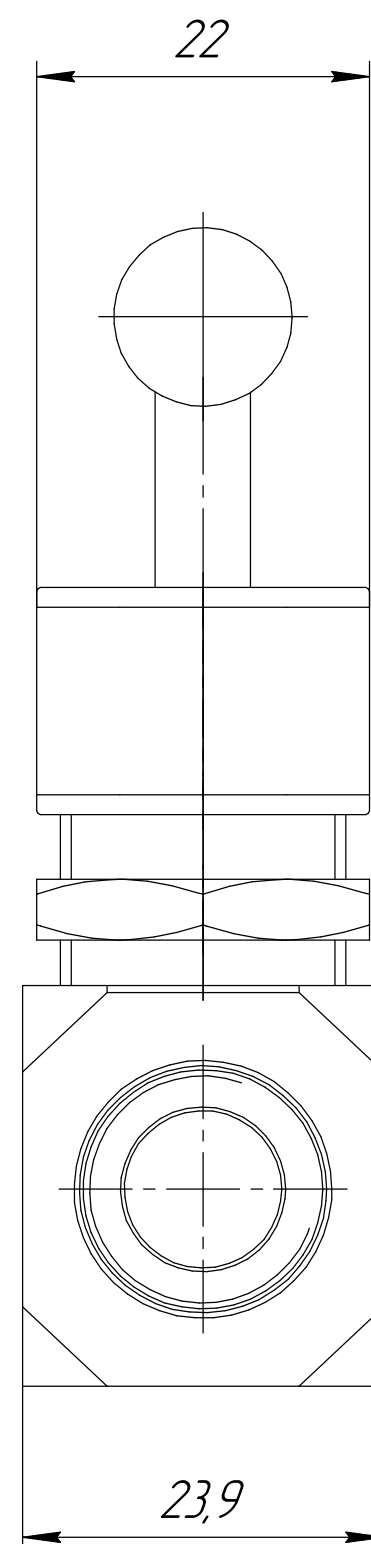
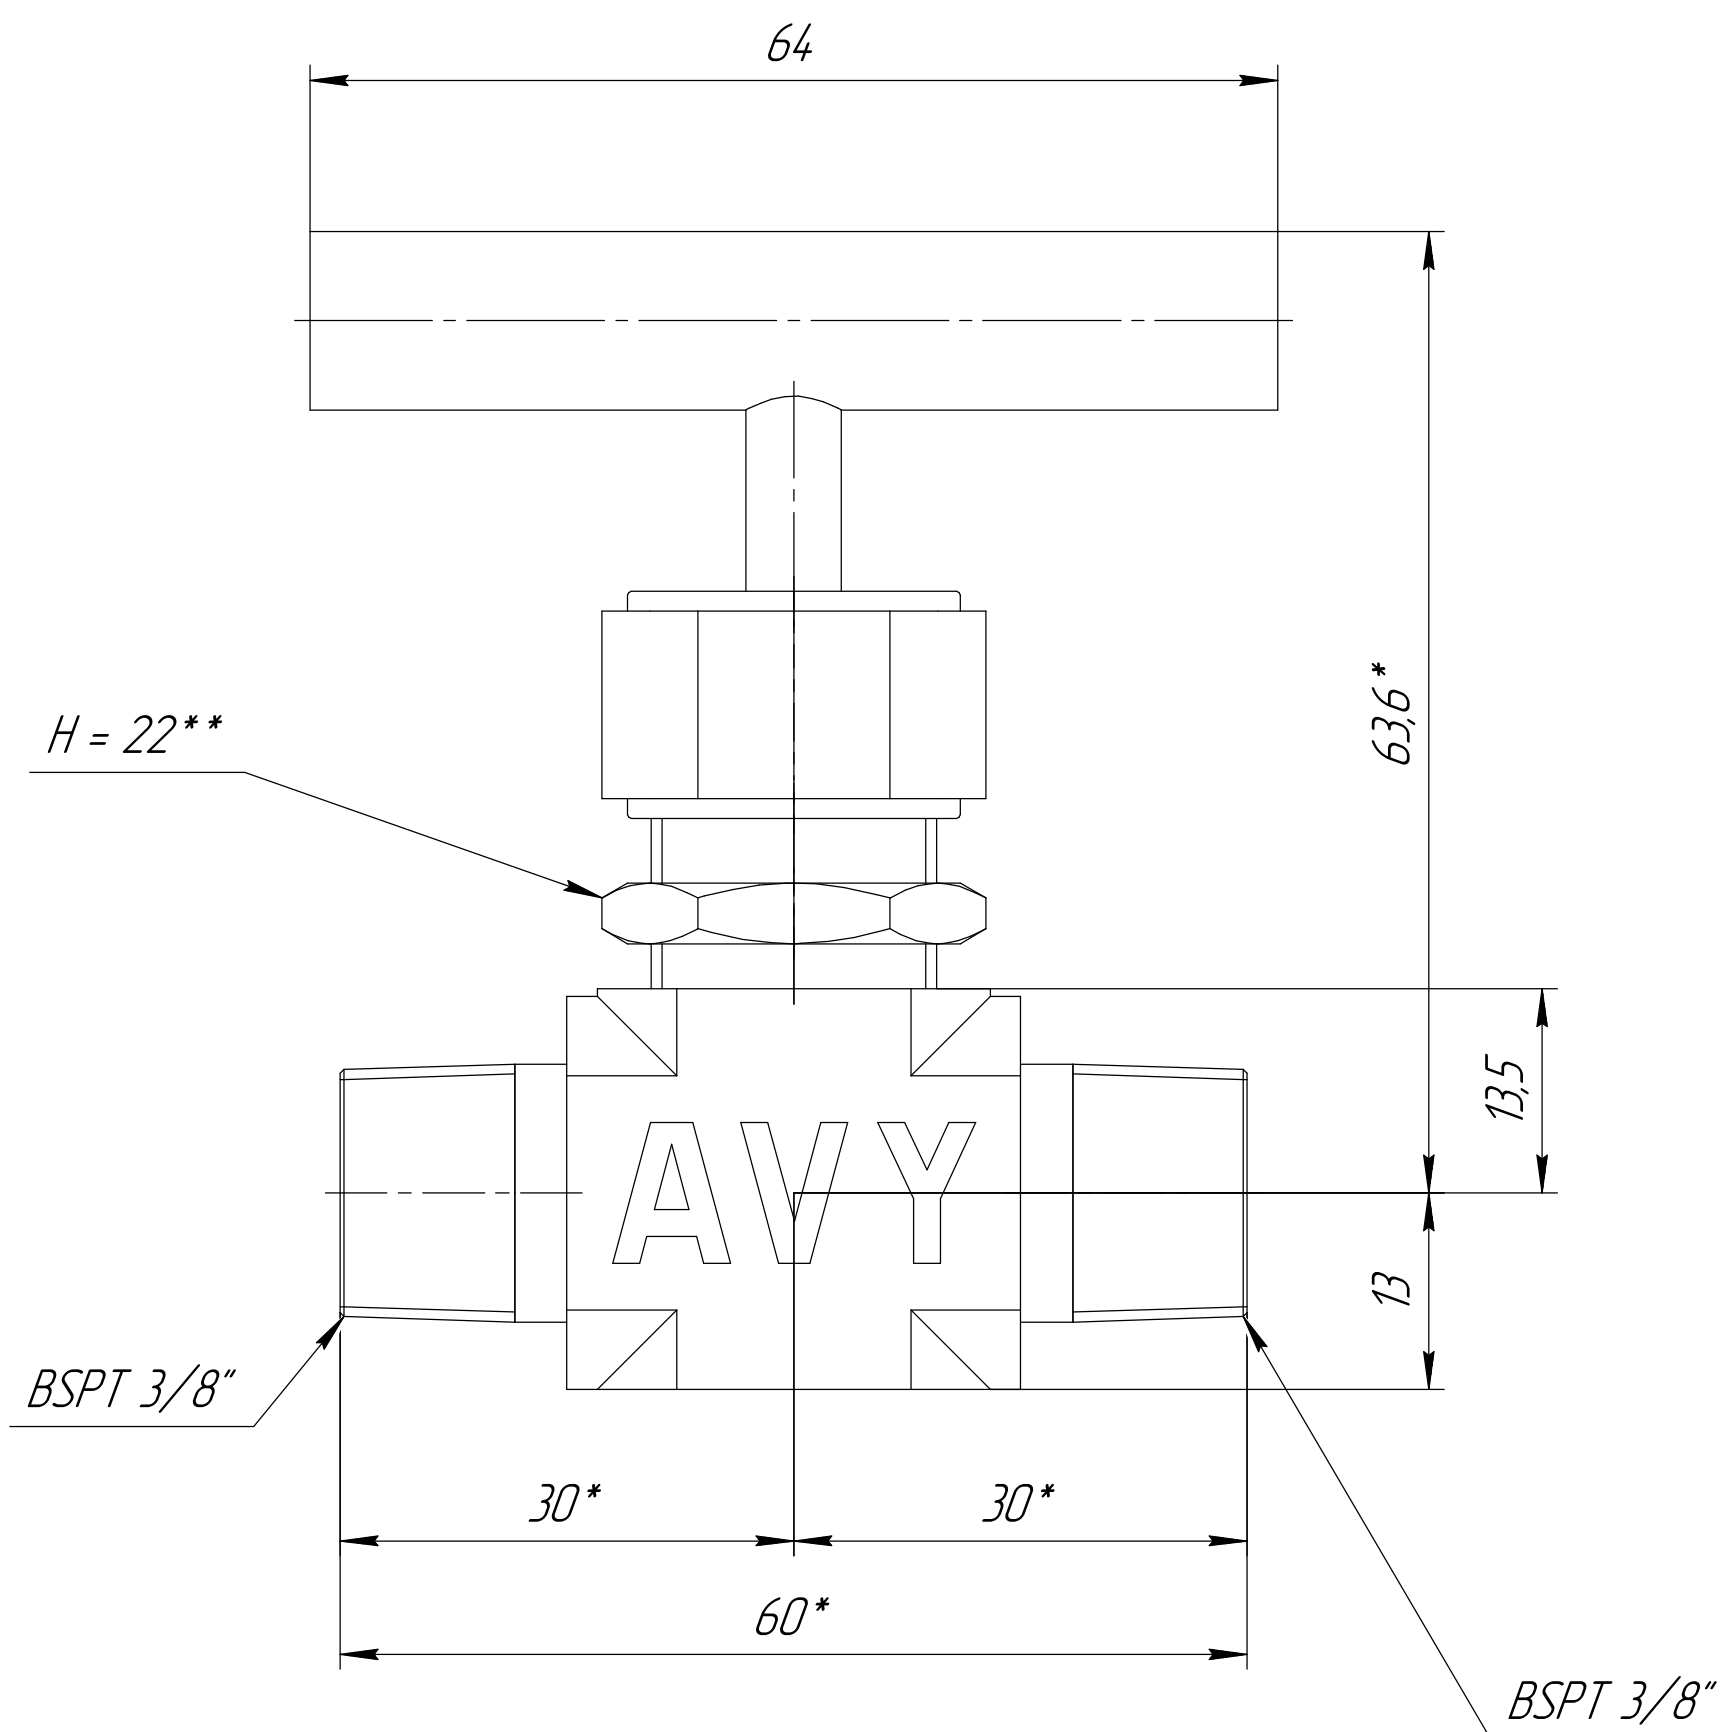
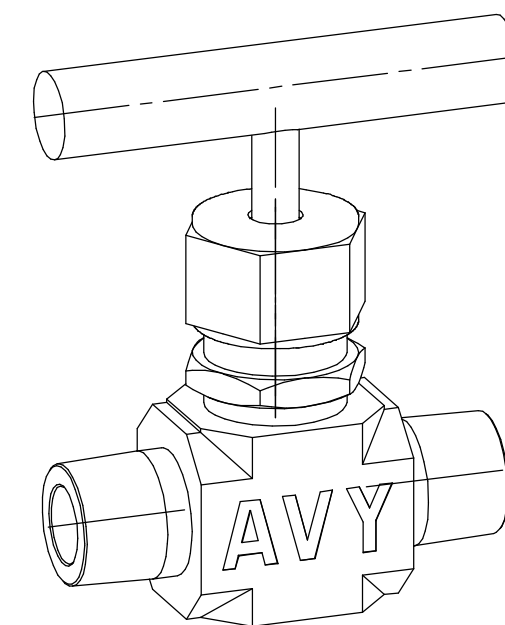


NV3-M-6R-PK.AVY.ORG

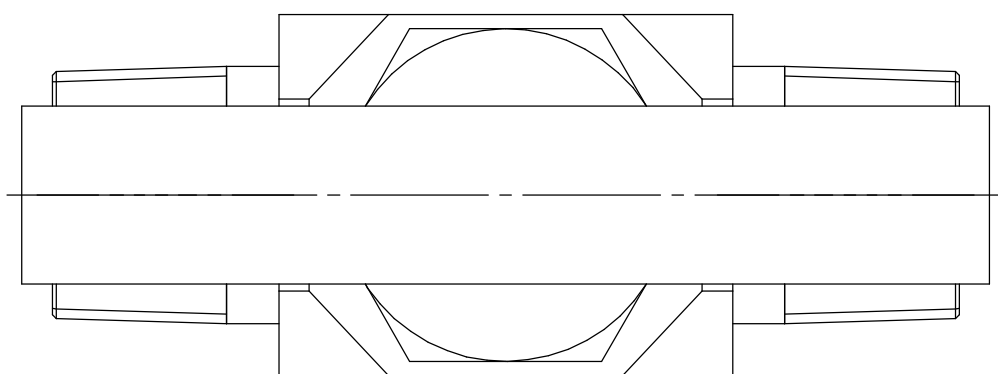

1. *This size may depend on the degree of tightening zaŭku
- 2 Pressure rating 413bar (T = 21 °C)
- 3 Temperature rating from -54 to 316°C
- 4 Needle V-shaped

					NV3-M-6R-PK.AVY.ORG				
					Needle valve	Char.		Weight	Scale
Ch. Sheet	Nº doc.	Sign.	Date						2:1
Develap.									
Checked									
Tech. contr.									
						Sheet		Sheets	1
Reg. contr.						HY-LOK CORPORATION			
Approv.									

Copied

Format A2

First mention

Reference Nº

Sign. and date

Inv. Nº copy

Exch. inv. Nº

Sign. and date

Inv. Nº orig.