

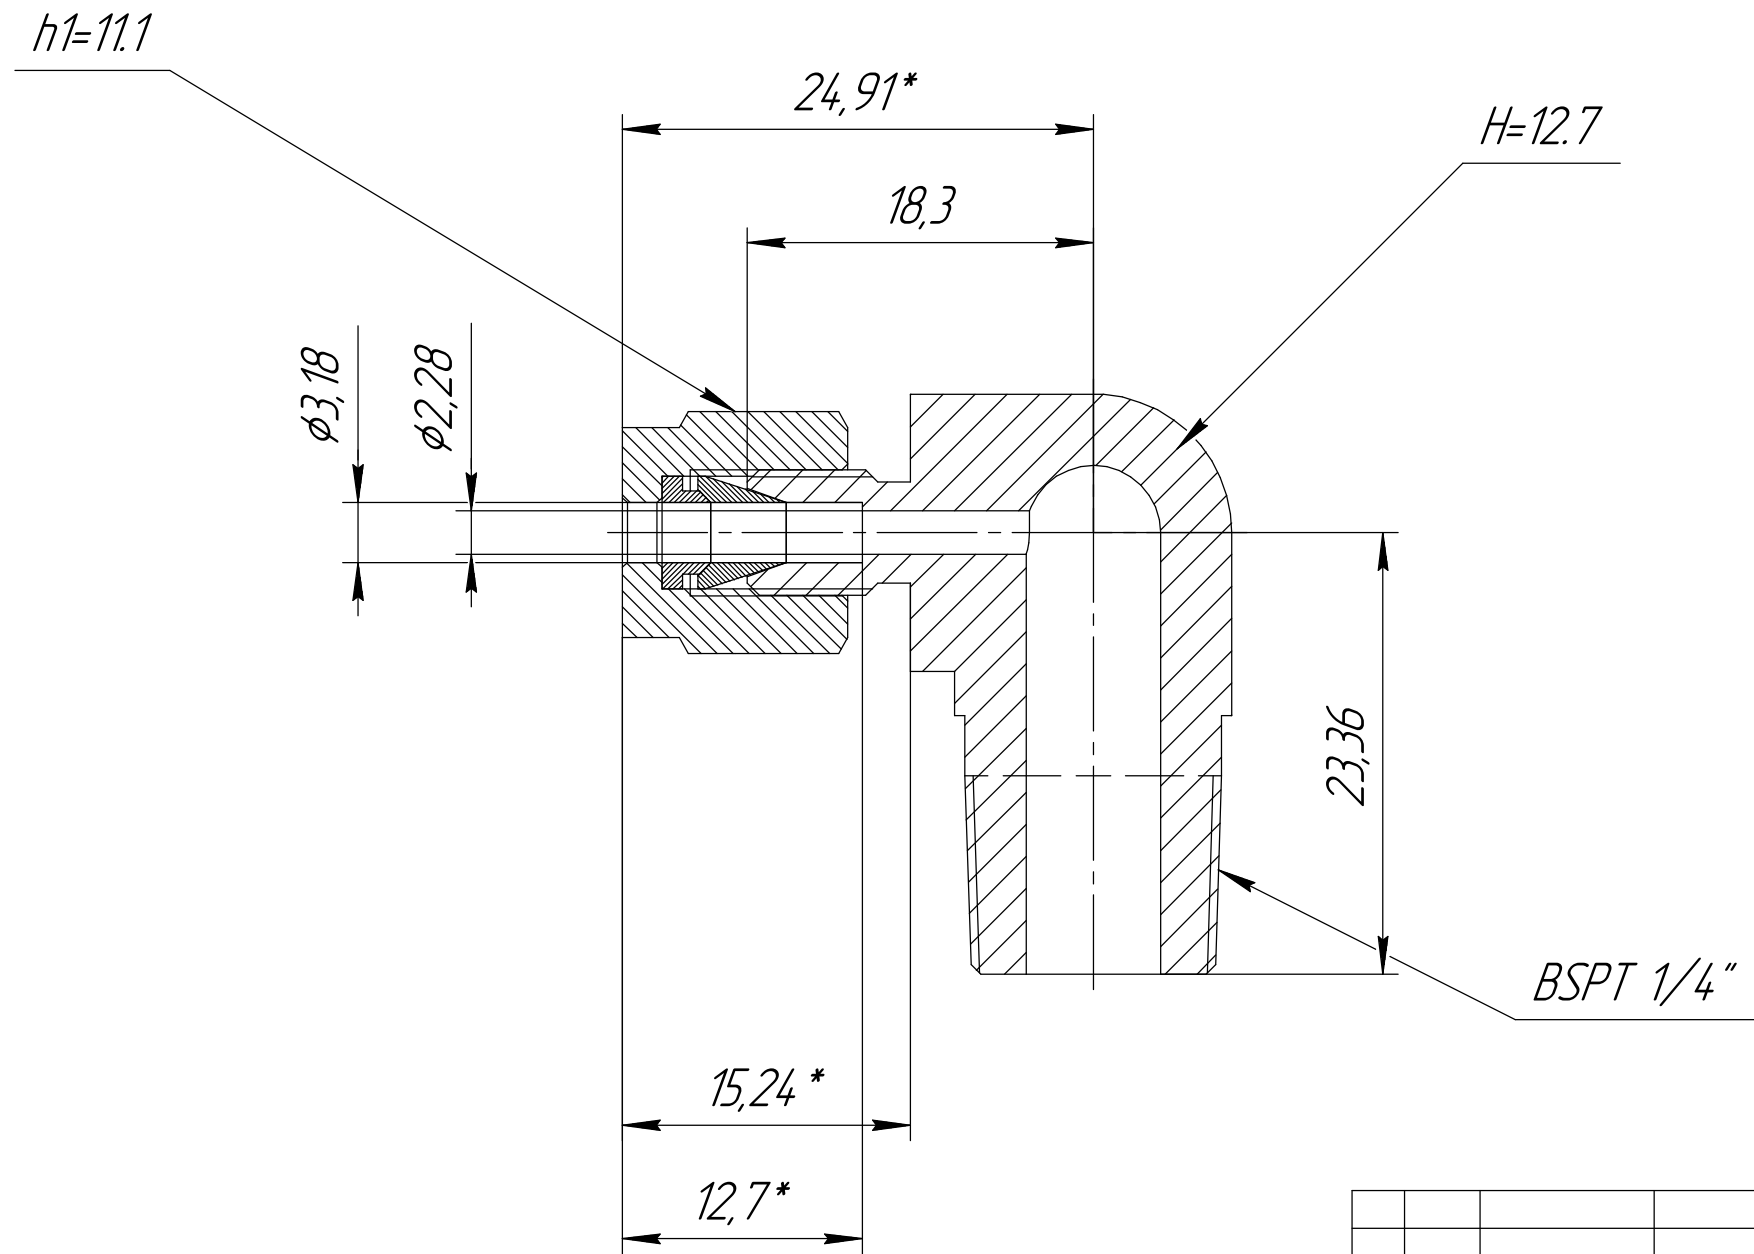


|               |                |               |              |                |              |               |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|
| Inv. N° orig. | Sign. and date | Exch. inv. N° | Inv. N° copy | Sign. and date | Reference N° | First mention |
|               |                |               |              |                |              |               |

CLMA-2-4R.AVY.ORG

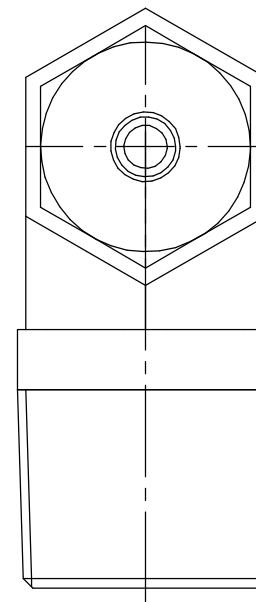

1. H and h1 – Hex sizes
2. \*This size may depend on the degree of tightening
3. Temperature rating from -196 to 649°C

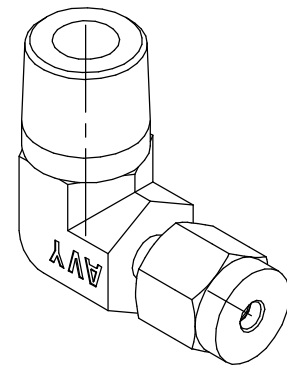

|              |         |       |      |  |                      |       |        |       |
|--------------|---------|-------|------|--|----------------------|-------|--------|-------|
|              |         |       |      |  | CLMA-2-4R.AVY.ORG    |       |        |       |
| Ch. Sheet    | N° doc. | Sign. | Date |  | Male elbow connector | Char. | Weight | Scale |
| Develop.     |         |       |      |  |                      |       |        | 2.5:1 |
| Checked      |         |       |      |  |                      |       |        |       |
| Tech. contr. |         |       |      |  |                      | Sheet | Sheets | 1     |
| Reg. contr.  |         |       |      |  |                      |       |        |       |
| Approv.      |         |       |      |  | HY-LOK CORPORATION   |       |        |       |

Copied

Format A3