
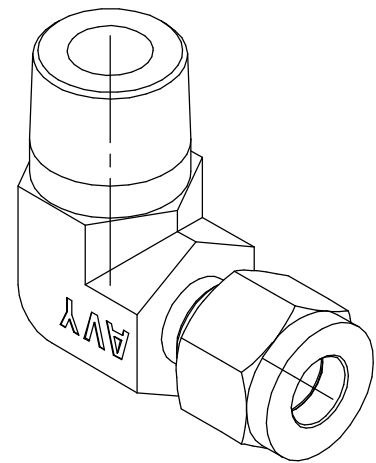
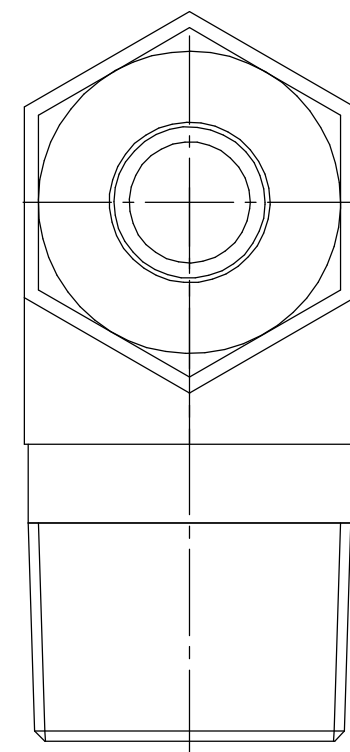


|               |                |               |              |                |              |               |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|
| Inv. N° orig. | Sign. and date | Exch. inv. N° | Inv. N° copy | Sign. and date | Reference N° | First mention |
|               |                |               |              |                |              |               |

CLMA-8M-6NAVY.ORG

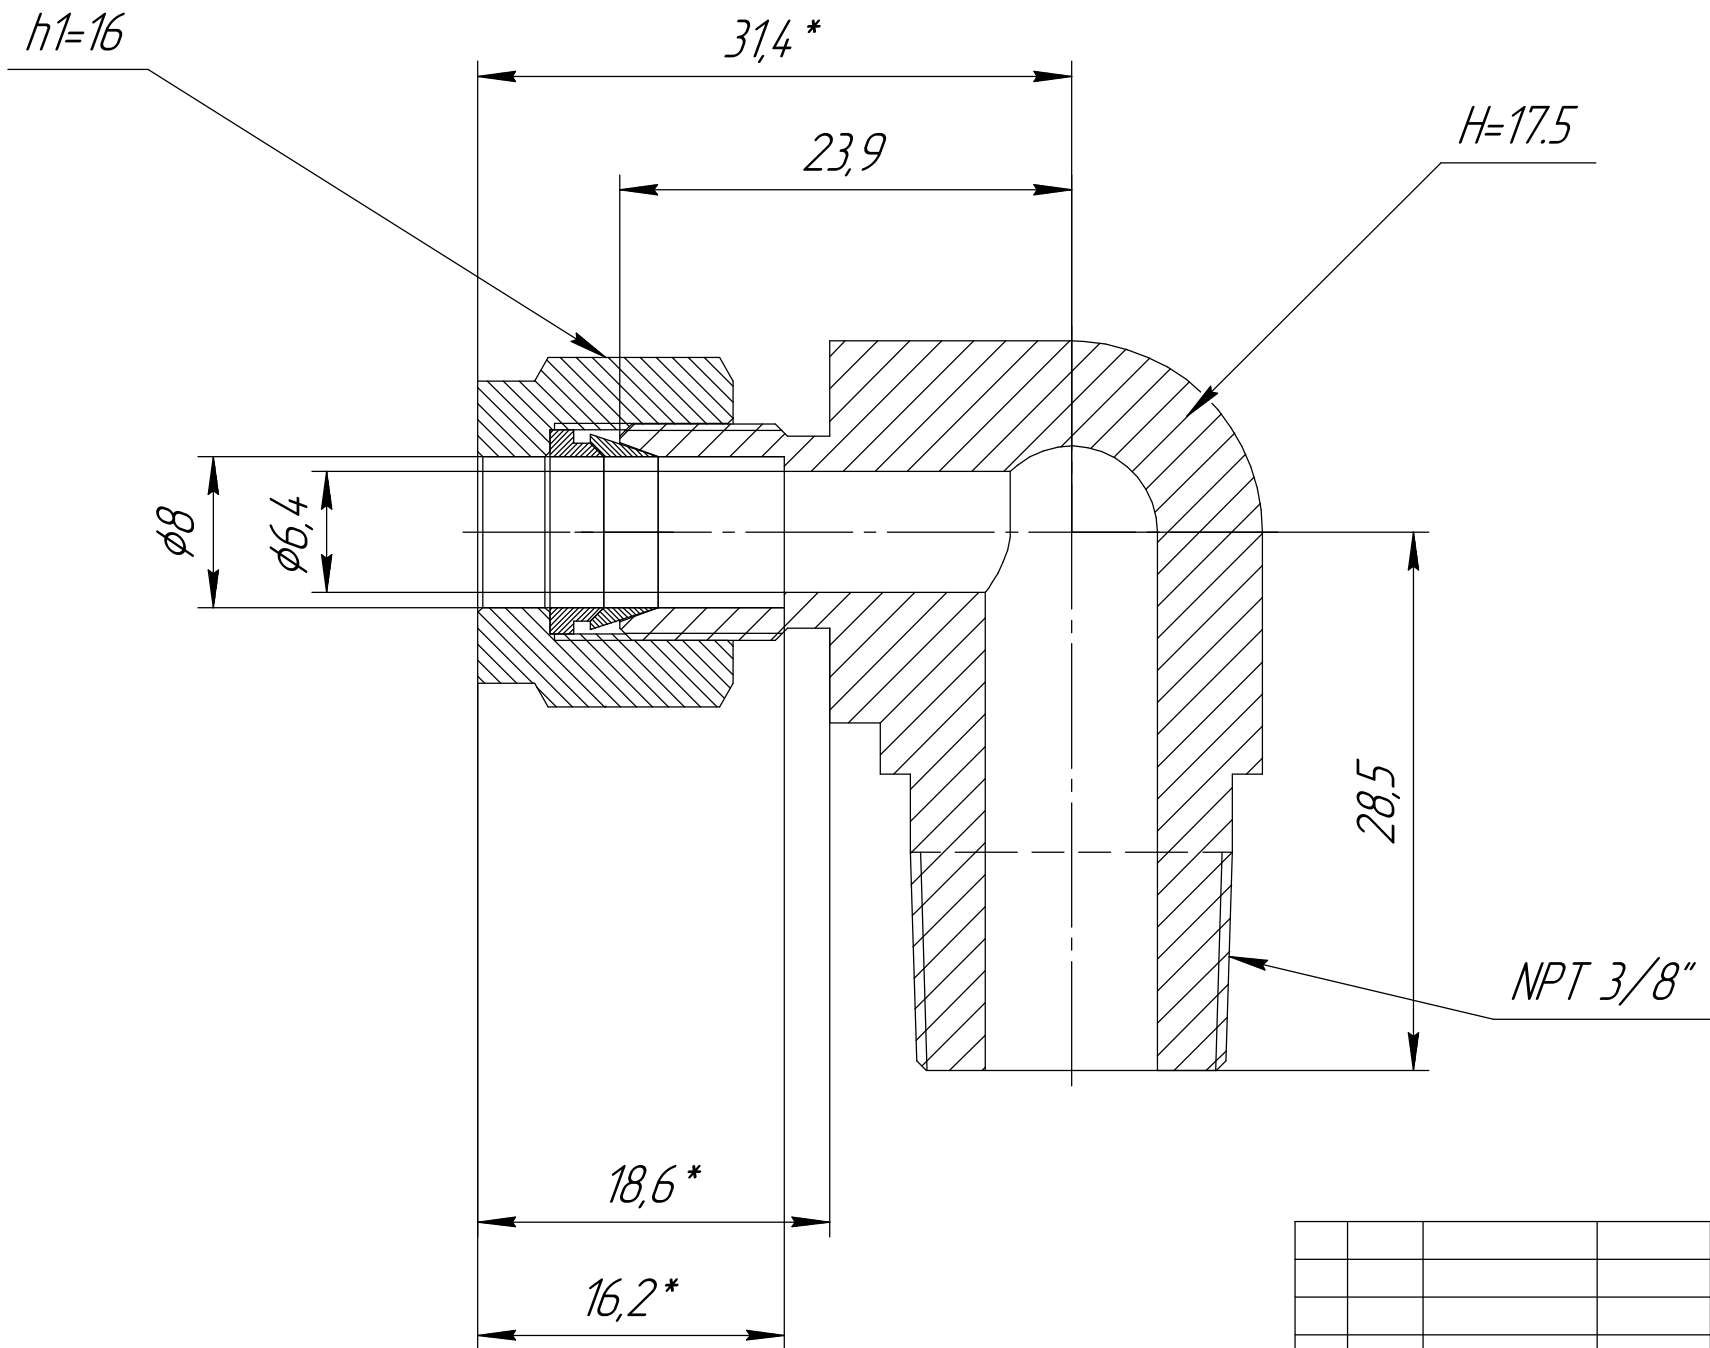

1. H and h1 – Hex sizes
2. \*This size may depend on the degree of tightening
- 3 Temperature rating from -196 to 649°C

|              |         |       |      |                      |        |       |  |
|--------------|---------|-------|------|----------------------|--------|-------|--|
| Ch. Sheet    | N° doc. | Sign. | Date | CLMA-8M-6NAVY.ORG    |        |       |  |
| Develop.     |         |       |      | Male elbow connector |        |       |  |
| Checked      |         |       |      |                      |        |       |  |
| Tech. contr. |         |       |      |                      |        |       |  |
| Reg. contr.  |         |       |      |                      |        |       |  |
| Approv.      |         |       |      |                      |        |       |  |
|              |         |       |      | Char.                | Weight | Scale |  |
|              |         |       |      |                      |        | 2.5:1 |  |
|              |         |       |      | Sheet                | Sheets | 1     |  |
|              |         |       |      | HY-LOK CORPORATION   |        |       |  |

Copied

Format A3