
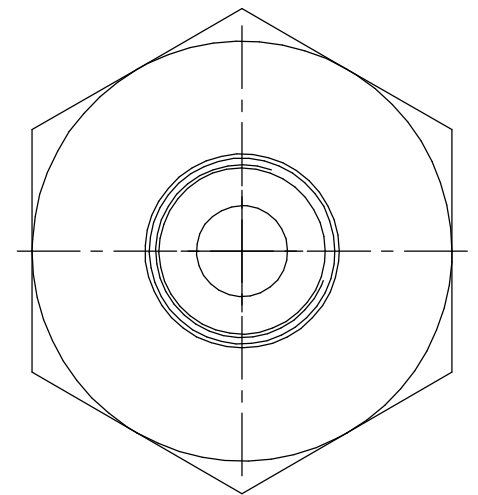
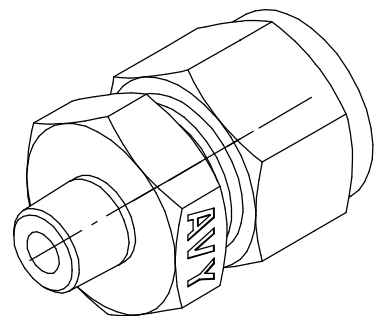


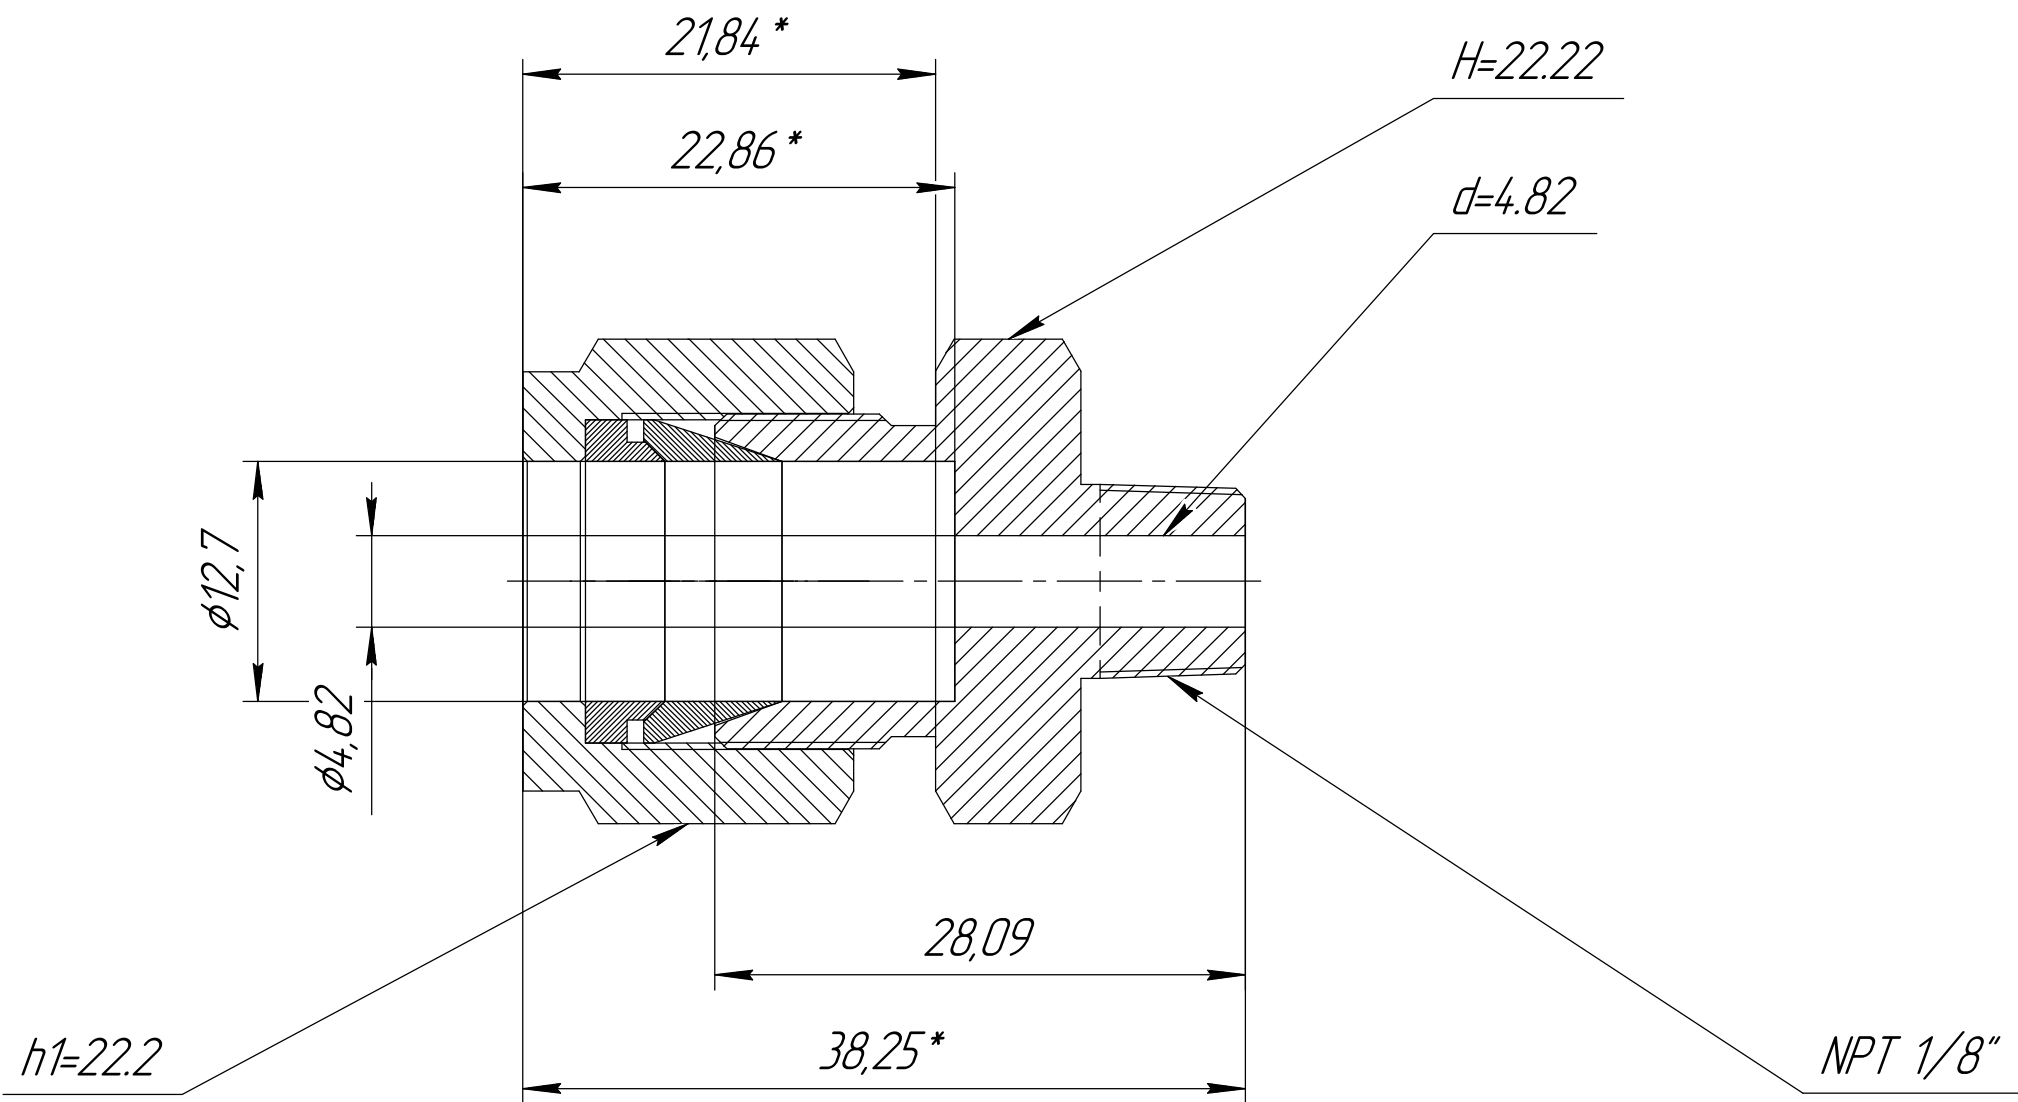

1. H and h1 – Hex sizes  
2. \*This size may depend on the degree of tightening  
3. Temperature rating from -196 to 649°C

|              |         |       |      |  |                 |                    |        |       |
|--------------|---------|-------|------|--|-----------------|--------------------|--------|-------|
|              |         |       |      |  | CMC-8-2NAVY.ORG |                    |        |       |
|              |         |       |      |  | Male Connector  | Char.              | Weight | Scale |
| Ch. Sheet    | N° doc. | Sign. | Date |  |                 |                    |        | 2.5:1 |
| Develop.     |         |       |      |  |                 |                    |        |       |
| Checked      |         |       |      |  |                 |                    |        |       |
| Tech. contr. |         |       |      |  |                 | Sheet              | Sheets | 1     |
| Reg. contr.  |         |       |      |  |                 | HY-LOK CORPORATION |        |       |
| Approv.      |         |       |      |  |                 |                    |        |       |